

KPC-E190

Ultra-High Resolution Bullet Camera




• Features

1/3" 960H SONY EXview HAD CCD II
Ultra-High Resolution of 700 TVL
 Min. Illumination of 0.1 Lux
 Board, Pinhole Lens
 2DNR (2D Digital Noise Reduction)

• Dimensions

(Unit : mm)

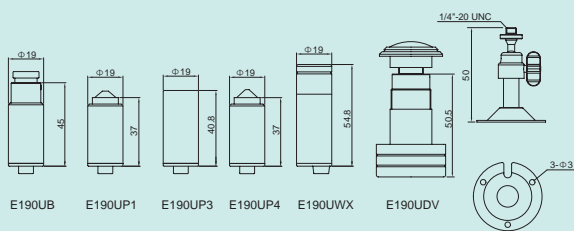

• Optional Lens



• Specifications

| Model Name | KPC-E190 |
|-----------------------|---|
| Image Device | 1/3" 960H SONY EXview HAD CCD II |
| Scanning System | 2:1 Interlace |
| Scanning Frequency | NTSC: 15.734KHz(H), 59.94Hz(V) / PAL: 15.625KHz(H), 50Hz(V) |
| H. Resolution | 700 TVL |
| Total Pixels | NTSC: 1020(H) X 508(V) / PAL: 1020(H) X 596(V) |
| Effective Pixels | NTSC: 976(H) X 494(V) / PAL: 976(H) X 582(V) |
| S/N Ratio | More than 50dB (AGC OFF) |
| Min. Illumination | 0.1 Lux |
| Sync. System | Internal |
| Gamma | $\gamma = 0.45$ |
| Video Output | 1.0 Vp-p Composite 75(Ω) |
| Lens | Board, Pinhole Lens |
| Electronic Shutter | NTSC: 1/60 ~ 1/100,000 sec / PAL: 1/50 ~ 1/100,000 sec |
| 2DNR | ON |
| Operating Temperature | 14°F~122°F (-10°C~+50°C) |
| Storage Temperature | -4°F~140°F (-20°C~+60°C) |
| Humidity | Less than 80% |
| Power Consumption | DC 12V ($\pm 10\%$), Max. 70mA |
| Option | Digital Day & Night |