

Features:

- Industrial level LCD panel, suitable for extensive 7×24 continuous works
- \cdot High fidelity digital processing, brilliant and vivid video
- \cdot Built in stereo speakers and audio amplifier
- \cdot Suitable for every video surveillance and security application: displays HDMI/VGA/BNC input
- \cdot Bright LED illuminated panel with ultra wide (178°H/ 178°V) viewing angle

 \cdot Included desk stand is easily removable for standard VESA mounting



Technical Specification

Μ	od	е	
---	----	---	--

Model	PRM24L
System	
Diagonal	23.8"(16:9)
Resolution	1920×1080
Backlight	LED
Brightness/Luminance (Standard)	250cd/m²
Contrast	1000:1
Angle of View	178°/178°(vertical/horizontal)
Response Time	5ms

Interfaces


Input	Standard	1 BNC, 1 VGA, 1 HDMI, 1 Audio
	Optional	-
Output	Standard	1 BNC, Built in speakers
	Optional	-

General

Consumption (Standard)	≤35W
Consumption (Standby)	≤0.5W

Power Supply	AC100~240V (+/-10%), 50/60 Hz
Weight	5.85kg(with base)
Dimensions(no base)	577.00x347.70x51.20mm
Work Environment	Temperature: 0°C~ 40°C
	Humidity: 10%~85%
Accessory	
Standard	VGA cable, power cable, pedestal
Optional	Hanging bracket

Dimensions(mm)

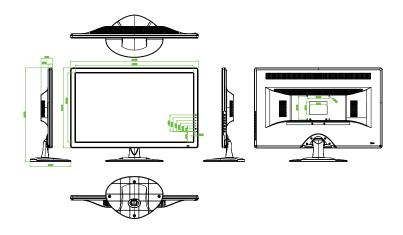

Distribuito da

