

New U-series compact network camera with enhanced functions and affordability

Full HD Varifocal Lens Indoor Box Network Camera

The new U series is an entry model that achieves high quality and reliability at an affordable price to meet the needs of a wide range of customers. The compact and slim design allows it to be installed in a various locations.

It newly supports ONVIF G / S / T profile and H.265 / H.264, and can be widely used for connecting various VMS and recorders. It also comes pre-installed with secure certificates, enabling device authentication and end-to-end communication encryption to counter the threat of advanced cyberattacks.

Key features

- Compact and slim design allows installation in various locations
- Compliant with ONVIF G / S / T profile and H.265 / H.264, and can support a wide range of connections to VMS and recorders
- Uses "Easy Kitting Packing" that allows you to set the camera without removing it from the box
- Strengthen cyber security by pre-installing digital certificates issued by a third party organization (GlobalSign)

Key i-PRO Spec.

- Full HD 1080p up to 30fps
- 2.5x built-in motorized zoom and motorized focus lens
- iA (intelligent Auto)
- Super Dynamic 120dB
- Color night vision (0.006 to 0.1 lx)
- H.265 Smart Coding
- Corridor mode
(90 degrees or 270 degrees in image rotation)
- ONVIF Profile G / S / T

Industry examples

- Retail
- Education
- Public safety
- Bank / Hospital / Building



i-PRO


Specifications

Camera	Image Sensor	Approx. 1/3 type CMOS image sensor		
	Minimum Illumination	Color : 0.1 lx, BW: 0.04 lx (50IRE, F2.0, Maximum shutter: Off (1/30s), AGC: 11) Color : 0.006 lx, BW: 0.0025 lx (50IRE, F2.0, Maximum shutter: max. 16/30s, AGC: 11) *1		
	White Balance	ATW1/ ATW2/ AWC		
	Maximum shutter	[30fps mode] Max. 1/10000 s to Max. 16/30 s [25fps mode] Max. 1/10000 s to Max. 16/25 s		
	Intelligent Auto	On / Off		
	Super Dynamic	On / Off, The level can be set in the range of 0 to 31.		
	Dynamic Range	Max.120 dB (Super Dynamic: On, Level: 31)		
	Adaptive Black Stretch	—		
	Back light compensation / High light compensation	BLC (Back light compensation) / HLC (High light compensation) / Off (only when Super dynamic / Intelligent Auto: Off)		
	Fog compensation	On / Off (only when Intelligent auto / auto contrast adjust: Off)		
	Maximum gain (AGC)	The level can be set in the range of 0 to 11.		
	Color/BW (ICR)	Off / On / Auto1 (Normal) / Auto2 (IR Light) / Auto3 (SCC)		
	Digital Noise Reduction	The level can be set in the range of 0 to 255.		
	Video Motion Detection (VMD)	On / Off, 4 areas available		
	Scene Change Detection(SCD)	On / Off, 1 areas available		
	Privacy Zone	On / Off, Up to 8 zones available		
Lens	Image rotation*2	0° (Off) / 90° / 180° (Upside-down) / 270°		
	Camera Title (OSD)	On / Off, Up to 20 characters (alphanumeric characters, marks)		
	Focal length	2.9 mm - 7.3 mm(1/8inches-9/32inches)		
	Optical zoom	2.5x (Motorized zoom / Motorized focus)		
	Extra optical zoom	2.5x - 3.8x (when resolution is 1280x720)		
DORI	Digital (electronic) zoom	Choose from 3 levels of x1, x2, x4		
	Angular Field of View	[16 : 9 mode] Horizontal : 44° (TELE) - 102° (WIDE), Vertical : 24° (TELE) - 56° (WIDE) [4 : 3 mode] Horizontal : 36° (TELE) - 84° (WIDE), Vertical : 27° (TELE) - 63° (WIDE)		
	Maximum Aperture Ratio	1 : 2.0 (WIDE) - 1 : 3.0 (TELE)		
	Focusing Range	1 m {39-3/8 inches} - ∞		
	Detect (25ppm / 8ppf)	Wide: 35.5 m / 116.6 ft, Tele: 98.5 m / 323.1 ft		
Browser GUI	Observe (62.5ppm / 19ppf)	Wide: 14.2 m / 46.6 ft, Tele: 39.4 m / 129.2 ft		
	Recognize (125ppm / 38ppf)	Wide: 7.1 m / 23.3 ft, Tele: 19.7 m / 64.6 ft		
	Identify (250ppm / 76ppf)	Wide: 3.6 m / 11.7 ft, Tele: 9.8 m / 32.3 ft		
	Camera Control	Brightness		
	GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese		
Network	Network IF	10Base-T / 100Base-TX, RJ45 connector		
	Resolution	[16 : 9 mode] 1920×1080, 1280×720, 640×360, 320×180 [4 : 3 mode] 1600×1200, 1280×960, VGA, QVGA		
	H.265/ H.264	Constant bit rate / VBR / Frame rate / Best effort		
	Transmission Mode	Unicast / Multicast		
	Transmission Type	Max. frame rate for each stream*3		
		Stream(1)	Stream(2)	Stream(3)
		1920x1080(30fps)	640x360(30fps)	Off
		1280x720(30fps)	1280x720(30fps)	Off
		1600x1200(30fps)	640x480(30fps)	Off
		JPEG(1)	JPEG(2)	
		1920x1080(1fps)	1280x720(1fps)	
		1600x1200(1fps)	1280x960(1fps)	
	JPEG	Image Quality	10 steps	

Network	Smart Coding	GOP(Group of pictures) control: On(Frame rate control) / On(Advanced) / On(Mid.) / On(Low) / Off * Frame rate control and Advanced are only available with H.265. AUTO VIQS: On/ Off
	Audio Compression	—
	Audio transmission mode	—
	Supported Protocol	IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMPv1/v2/v3, DHCPv6, RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTP/RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMPv1/v2/v3, UPnP, ICMP, ARP, IEEE 802.1X, DiffServ
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)
Alarm	SDXC/SDHC/SD Memory Card (Option)	H.265/H.264 recording: Manual REC / Alarm REC (Pre/Post) / Schedule REC Available SDXC/SDHC/SD Memory Card : microSDXC memory card: 64 GB, 128 GB, 256 GB, 512 GB microSDHC memory card: 4 GB, 8 GB, 16 GB, 32 GB microSD memory card: 2 GB
	Mobile Terminal Compatibility	iPad, iPhone, Android™ terminals
	ONVIF Profile	G / S / T
	Alarm Source	VMD alarm, SCD alarm, Command alarm
	Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification Indication on browser, Panasonic alarm protocol output
Input/ Output	Monitor Output(for adjustment)	—
	Audio input	—
	Audio Output	—
	External I/O Terminals	—
General	Safety	UL (UL60950-1), c-UL (CSA C22.2 No.60950-1), CE, IEC60950-1
	EMC	FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55024
	Power Source and Power Consumption	PoE (IEEE802.3af compliant) Device: DC48 V 90 mA, Approx. 4.3 W (Class 2 device)
	Ambient Operating Temperature	-10 °C to +50 °C (+14 °F to +122 °F) {Power On range: 0 °C to +50 °C (+32°F to +122 °F)}
	Ambient Operating Humidity	10 to 90 % (no condensation)
	Dimensions	59 mm (W) x 49 mm (H) x 116 mm (D)
	*Installing using the base bracket	{2-5/16 inches (W) x 1-15/16 inches (H) x 4-9/16 inches (D)} (excluding side cover)
	Mass (approx.)	155 g { 0.34 lbs. }
	Finish	Main body: PC / ABS resin, i-PRO white

*1 Converted value
*2 When "4:3(30fps mode)" or "4:3(25fps mode)" is selected for "Image capture mode",
"90 °" and "270 °" cannot be selected.
*3 Smart Coding(GOP and AUTO VIQS) is not available when setting 30fps.

Appearance

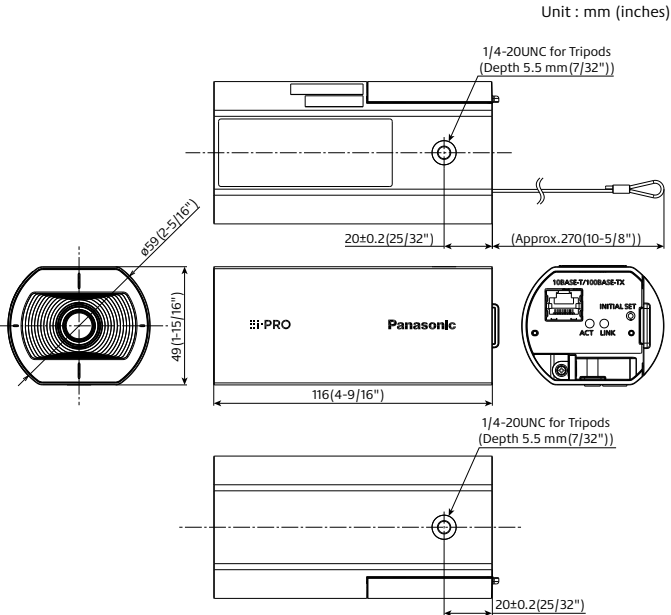

Trademarks and registered trademarks
– iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.
– Android is a trademark of Google LLC.
– ONVIF is trademarks or registered trademarks of Onvif Inc.
– All other trademarks identified herein are the property of their respective owners.

Important
– Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
– Panasonic i-PRO Sensing Solutions Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

Panasonic®

Panasonic Corporation

Panasonic i-PRO Sensing Solutions Co., Ltd.

<https://ipro.panasonic.com>

<https://security.panasonic.com>

<https://www.linkedin.com/company/i-pro-sensing-solutions-co-ltd/>